


背视图

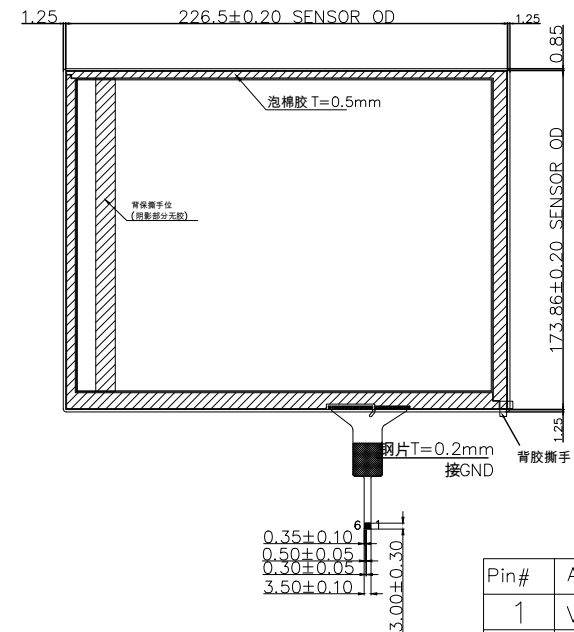

Pin#	Assignment
1	VDD_3.3V
2	SDA 2.8V
3	SCL 2.8V
4	INT
5	RST
6	GND

1. G+G: Cover Glass+SCA+ITO GLASS+FPC,
Cover Glass:1.1MM, SCA:.20mm, ITO GLASS:0.70mm,
Total Thickness:2.0±0.15mm(exclude foam and TFT)
2. TP Type :GT9271(COF), Supply Voltage : 3.3V ,IO Voltage :3.3V; Numbers of Channel : 20*27
3. Transmittance : ≥85%; TP Resolution :X:800,Y:600 ; Coordinate Orign :Upper Left Corner
4. Operating Temperture : -20℃~-70℃, ≤90%RH; Storage Temperature : -30℃~+80℃, ≤90%RH
5. Hardness of Cover Lens : ≥6H (750gf/Pencil Hardness Grade)
6. Cover Glass Material :Glass (AGC)
7. Tolerance : ±0.2mm

Victronix Tecenstar INT'L Co., LTD						
DRAWN BY:	Solon	2025-02-22	TITLE ID:	CTP-VX104B5747-GG	UNITS?	MM
CHECKED BY:			CUSTOMER ID?		SCALE:	1: 1
APPROVED BY:			VERSION ID?	Ver.1	PAGE :	1/1