



RoHS

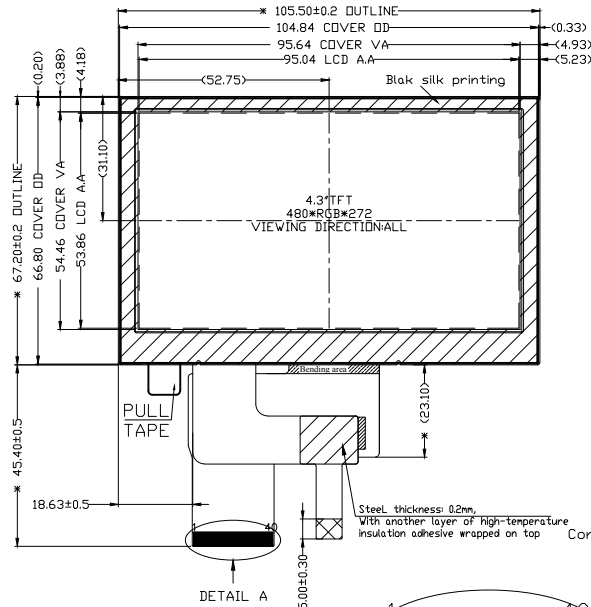

DETAIL A(2.5:1)

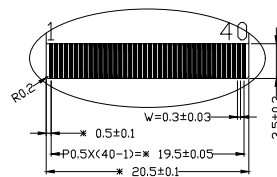


NOTE FOR LCD MODULE:

1.DISPLAY TYPE:	4.3" TFT NORMALLY BLACK
2.DISPLAY RESOLUTION:	480×RGB×272
3.VIEWING DIRECTION:	U/L/D/R 80/80/80/80
4.OPERATING TEMPERATURE:	-20°C ~ 70°C
5.STORAGE TEMPERATURE:	-30°C ~ 80°C
6.LCM DRIVER IC:	ST7282A
7.LCM LUMINANCE:	400cd/m2 (typ)
8.TOLERANCE:	±0.2

NOTE FOR CTP:

1.POWER SUPPLY:	3.3V
2.CTP INTERFACE:	IIC
3.TRANSMITTANCE:	≥85%
4.SURFACE HARDNESS:	6H
5.STRUCTURE:	COVER GLASS+ITO GLASS
6.SURFACE TREATMENT:	-
7.CTP DRIVER IC:	ST1633I
8.TOLERANCE:	±0.2



PIN	FUNCTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PC1 K
31	DI SP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YU
39	XL
40	VU

PIN	DEFINE
1	VCC
2	GND
3	SCL
4	SDA
5	INT
6	RST

NAME	YY.MM.DD	VICTRONIX TECENSTAR INT'L Co., LTD	
DRAWN:	Solon	2024.12.31	
CHECKED:		TITLE:	LCD MODULE DIMENSION
APPROVED:		PRODUCT:	COLOR TFT LCD MODULE
SCALE 1:1	UNIT:MM	DWARING NO.:	VXT430MPSA-01CA
SHEET 1 OF 1		CUSTOMER NO.:	N/A