


FRONT


SIDE

BACK

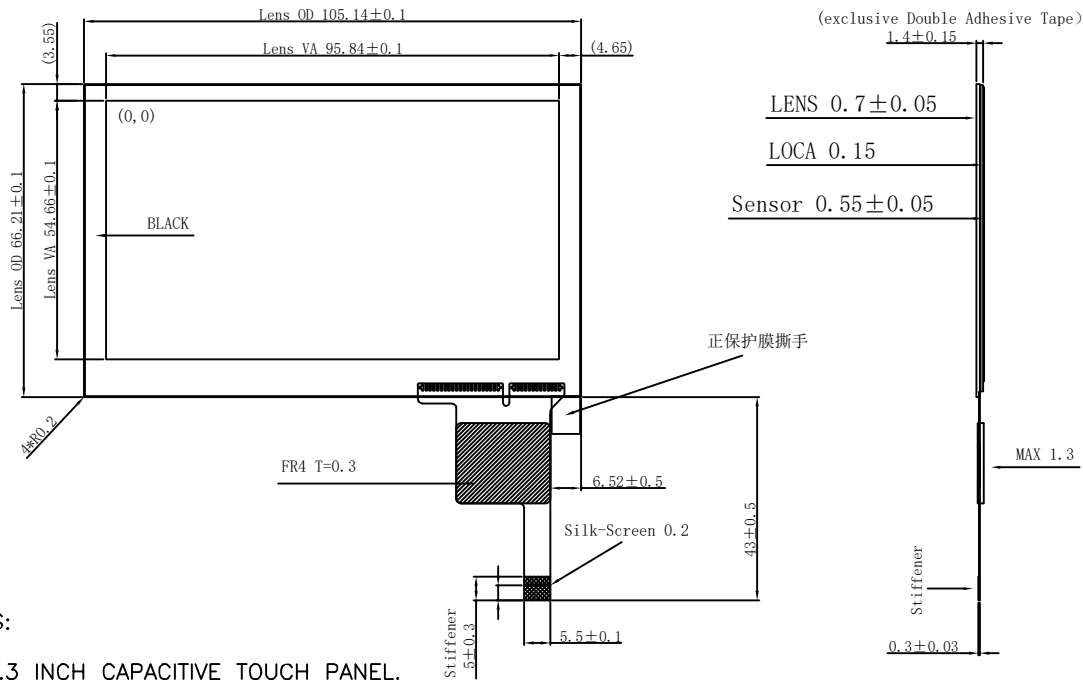

NOTES:

- 4.3 INCH CAPACITIVE TOUCH PANEL.
- OPERATING VOLTAGE : VDD=2.8-3.3V; IOVCC=3.3V.
- G+G : LENS + SENSOR + FPCA.
- RESOLUTION: 480 X 272 DOTS.
- CTP DRIVER: EETI EXC3146
- MULTI FINGER: UP TO 5.
- HARDNESS OF COVER SURFACE : 6H.
- TRANSMITTANCE : $\geq 83\%$.
- OPERATING TEMP : -10°C TO $+60^{\circ}\text{C}$.
- STORAGE TEMP : -20°C TO $+70^{\circ}\text{C}$.
- GENERAL TOLERANCE : ± 0.2 .
- RoHS COMPLIANT.

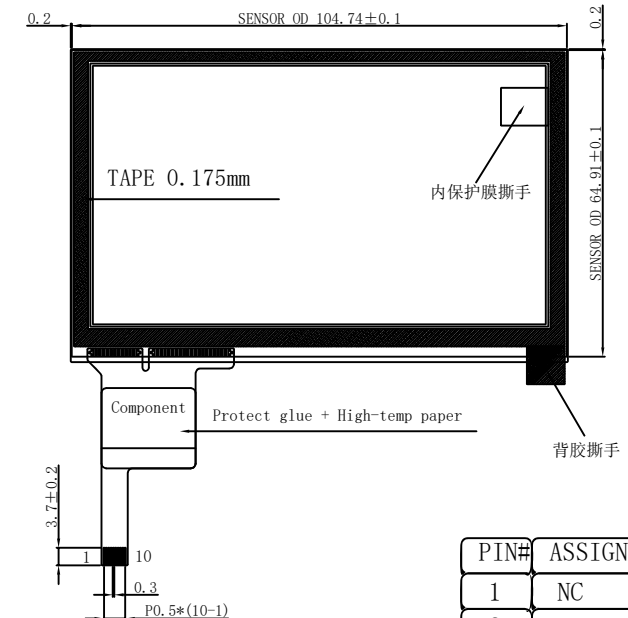

PIN#	ASSIGNMENT
1	NC
2	NC
3	RST
4	GND
5	INT
6	SDA
7	SCL
8	GND
9	GND
10	VDD

DRAWN CL 2106.12.16
ME.CHECKED
EE.CHECKED
APPROVED

TITLE
MODULE SPEC.

DRAWING NO.
CTP-T430GF-04
UNIT mm SCALE FIT
3rd Angle  SHEET 1 OF 1

CUSTOMER'S
APPROVAL

Victronix Tecenstar INT'L Co., LTD

00

VER. SYMBOL

AMENDMENT

SIGN

DATE