


VICTRONIX	Add:	Room 1405A, Building 1B, Hua qiang Idea Park, GuangMing District, Shenzhen, China		
	Tel:	+86-755-33265935	Fax:	+86-755-33265935

SPECIFICATION

VXT500QWH-51C

☐ Preliminary Specification

☐ Final Specification



CUSTOMER:

Made By:

Checked By:

Approved By:

Quality:

Date:

Note:

Approved By:

Date:

Note:

2. Revision Record

Date	Rev.No	Page	Revision Items	Prepared
2019-06-27	V0		The first release	Solon

3. General Specifications


VXT500QWH-51C is a TFT-LCD module. It is composed of a TFT-LCD panel, driver IC, FPC, a back light unit and CTP. The 5.0'' display area contains 800 x (RGB) x 480 pixels and can display up to 16.7M colors. This product accords with ROHS environmental criterion.

Note 1: Color tune is slightly changed by temperature and driving voltage.

Note 2: Without FPC and Solder.With CTP

Item	Contents	Unit	Note
LCD Type	TFT	-	
Display color	16.7M	-	1
Viewing Direction	12	O'Clock	
Gray inversion	6	O'Clock	
Operating temperature	-20~+70	℃	
Storage temperature	-30~+80	℃	
Module size	120.7X76.3X5.28	mm	2
Active Area(W×H)	108.0X64.8	mm	
Number of Dots	800×480	dots	
TFT Controller	ILI5960+ILI6122	-	
CTP Driver	FT5426	-	
Power Supply Voltage	3.3	V	
Backlight	6S3P-LEDs (white)	pcs	
Weight	---	g	
Interface	RGB888	-	

4.Outline.Drawing

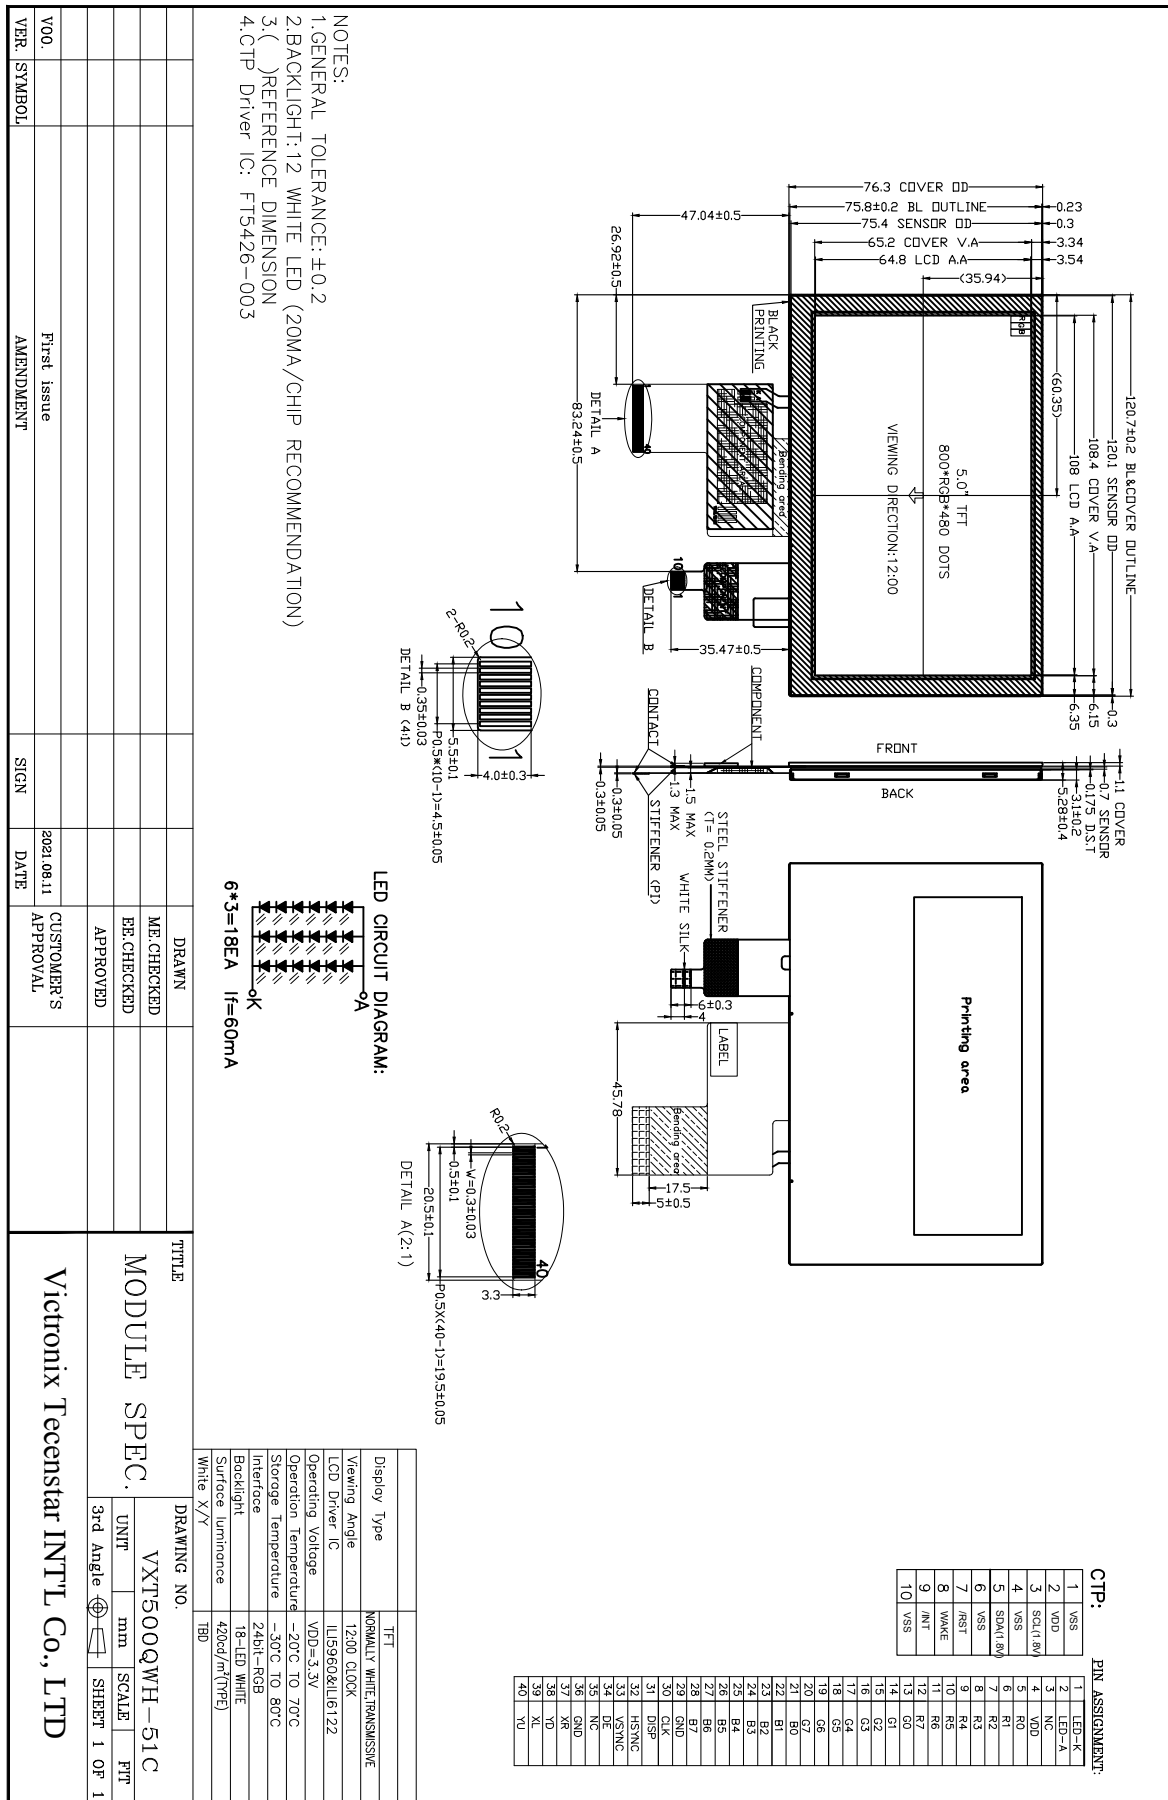

5. Absolute Maximum Ratings($T_a=25^{\circ}\text{C}$)

5.1 Electrical Absolute Maximum Ratings.($V_{ss}=0\text{V}$, $T_a=25^{\circ}\text{C}$)

Item	Symbol	Min.	Max.	Unit	Note
Power Supply Voltage	VDD	-0.5	5.0	V	1, 2
Power Supply Voltage	VDD-CTP	2.7	3.6	V	1, 2

Notes:

1. If the module is above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.
2. $V_{DD} > V_{SS}$ must be maintained.

5.2 Environmental Absolute Maximum Ratings.

Item	Storage		Operating		Note
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature	-30°C	80°C	-20°C	70°C	1,2
Humidity	-	-	-	-	3

1. The response time will become lower when operated at low temperature.
2. Background color changes slightly depending on ambient temperature.

The phenomenon is reversible.

3. $T_a \leq 40^{\circ}\text{C}$:85%RH MAX.

$T_a > 40^{\circ}\text{C}$:Absolute humidity must be lower than the humidity of 85%RH at 40°C .


6. Electrical Specifications

6.1 Electrical characteristics($V_{SS}=0V$, $T_a=25^{\circ}C$)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Power supply	VDD	$T_a=25^{\circ}C$	3.0	3.3	3.6	V	
Power supply	VDD-CTP	$T_a=25^{\circ}C$	2.8	-	3.3	V	
Input voltage	'H'	V_{IH}	$V_{DD}=3.3V$	$0.7V_{DD}$	-	V_{DD}	V
	'L'	V_{IL}	$V_{DD}=3.3V$	0	-	$0.3V_{DD}$	V

6.2 LED backlight specification($V_{SS}=0V$, $T_a=25^{\circ}C$)

Item	Symbol	Condition	Min	Typ	Max	Unit	Note
Supply voltage	V_f	$I_f=60mA$	16.8	18.0	19.2	V	
Uniformity	ΔB_p	$I_f=60mA$	75	80	-	%	
Life Time	time	$I_f=60mA$	20K	-		hours	1

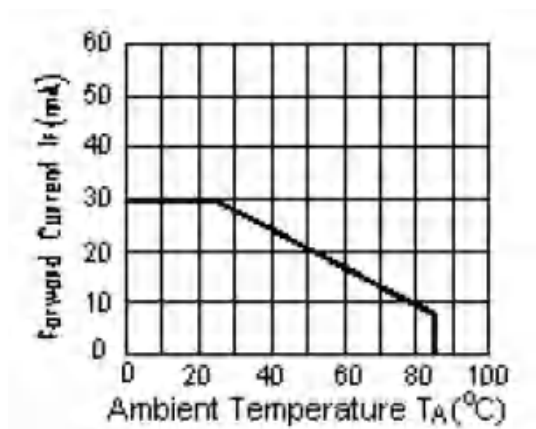

Note 1: Brightness to be decreased to 50% of the initial value at ambient temperature $T_A=25^{\circ}C$


6.3 Interface signals

Pin No.	Symbol	I/O	Function
1	LED-K	P	LED backlight(Cathode)
2	LED-A	P	LED backlight(anode)
3	NC	-	NC
4	VDD	P	Power supply(Digital +3.0V)
5-12	R0-R7	I	Red data bus
13-20	G0-G7	I	Green data bus
21-28	B0-B7	I	Blue data bus
29	GND	I	Ground
30	CLK	I	Clodk
31	DISP	I	Display on/off
32	HSYNC	I	Horizontal synchronous signal
33	VSUNC	I	Vertical synchronous signal
34	DEN	I	Data Enable
35	NC	-	NC
36	GND	P	Ground
37	XR	I	RTP pin ,not use please NC
38	YD	I	
39	XL	I	
40	YU	I	


CTP interface

Pin No	Symbol	I/O	Function
1	VSS	P	Ground
2	VDD	P	CTP Power supply
3	SCL	I	Serial clock
4	VSS	P	Ground
5	SDA	I	Serial Inputloutpt data bus
6	VSS	P	Ground
7	/RST	I	Reset PIN
8	WAKE	-	NC
9	/INT	-	External Interrupt to the IC of CTP
10	VSS	p	Ground

6.4 AC Characteristics

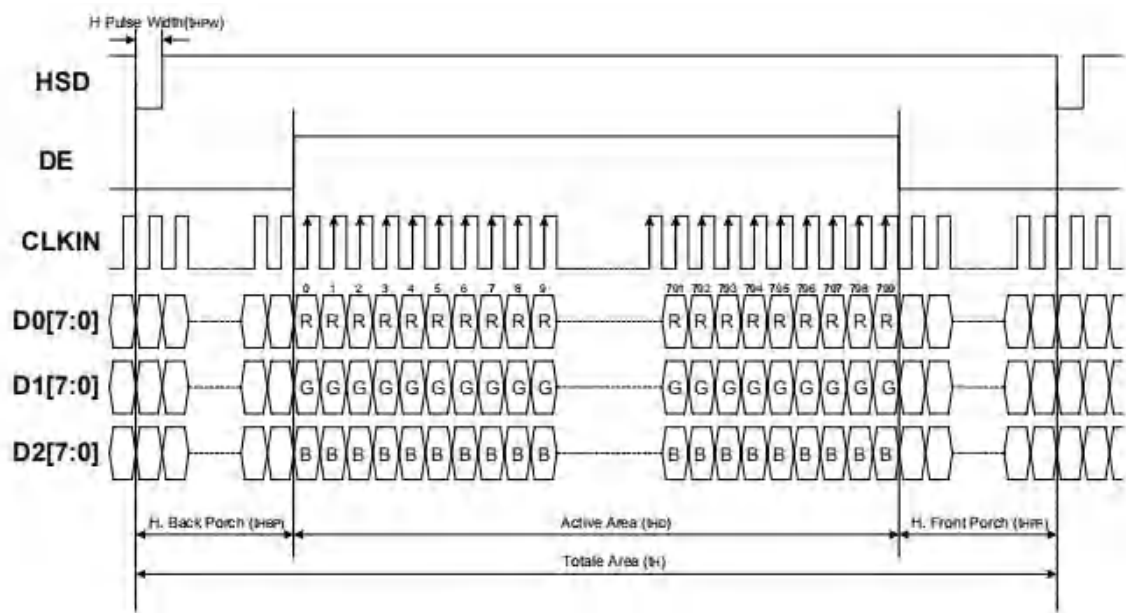

Horizontal Input Timing						
Parameter		Symbol	Value			Unit
			Min.	Typ.	Max.	
Horizontal display area		t_{HD}	—	800	—	CLKIN
CLKIN frequency		f_{CLK}	—	33.3	50	MHz
1 Horizontal line period		t_H	862	1056	1200	CLKIN
HSD pulse width	Min.	t_{HPW}	—	1	—	CLKIN
	Typ.		—	—	—	CLKIN
	Max.		—	40	—	CLKIN
HSD back porch	SYNG	t_{HBP}	46	46	46	CLKIN
HSD front porch	SYNG	t_{HFP}	16	210	354	CLKIN

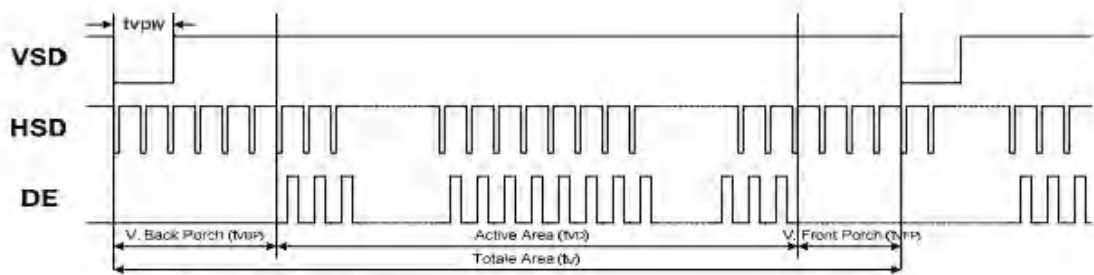

Vertical Input Timing					
Parameter	Symbol	Value			Unit
		Min.	Typ.	Max.	
Vertical display area	t_{VD}	—	480	—	HSD
VSD period time	t_V	510	525	650	HSD
VSD pulse width	t_{VPW}	1	—	20	HSD
VSD back proch	t_{VBP}	23	23	23	HSD
VSD front porch	t_{VFP}	7	22	147	HSD

7. Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Brightness (with TP)	Bp	$\theta=0^\circ$ $\phi=0^\circ$	-	420	-	Cd/m ²	1
Uniformity	ΔBp		75	80	-	%	1,2
Viewing Angle	3:00	Cr $\geq$ 10	-	65	-	Deg	3
	6:00		-	55	-		
	9:00		-	65	-		
	12:00		-	65	-		
Contrast Ratio	Cr	$\theta=0^\circ$ $\phi=0^\circ$	300	500	-	-	4
Response Time	T _r		-	10	20	ms	5
	T _f		-	10	20	ms	
Color of CIE Coordinate	W	x	-	TBD	-	-	1,6
		y	-	TBD	-	-	
	R	x	-	TBD	-	-	
		y	-	TBD	-	-	
	G	x	-	TBD	-	-	
		y	-	TBD	-	-	
	B	x	-	TBD	-	-	
		y	-	TBD	-	-	
NTSC Ratio	S		-	-	-	%	


Note: The parameter is slightly changed by temperature, driving voltage and materiel

Note 1: The data are measured after LEDs are turned on for 5 minutes. LCM displays full white.
The brightness is the average value of 9 measured spots. Measurement equipment PR-705 (Φ8mm)

Measuring condition:

- Measuring surroundings: Dark room.
- Measuring temperature: Ta=25 ℃.
- Adjust operating voltage to get optimum contrast at the center of the display.

Measured value at the center point of LCD panel after more than 5 minutes while
backlight turning on.

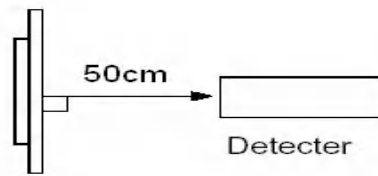


Note 2: The luminance uniformity is calculated by using following formula.

$$\Delta Bp = Bp (\text{Min.}) / Bp (\text{Max.}) \times 100 (\%)$$


$Bp (\text{Max.})$ = Maximum brightness in 9 measured spots

$Bp (\text{Min.})$ = Minimum brightness in 9 measured spots.

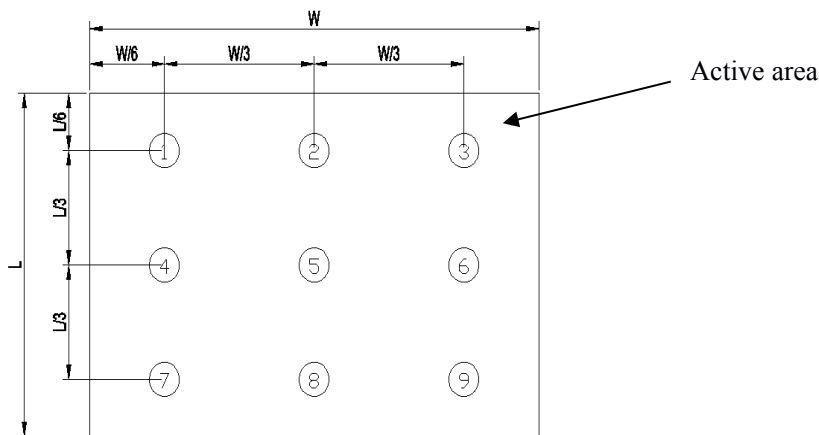


Note 3: The definition of viewing angle:

Refer to the graph below marked by θ and Φ

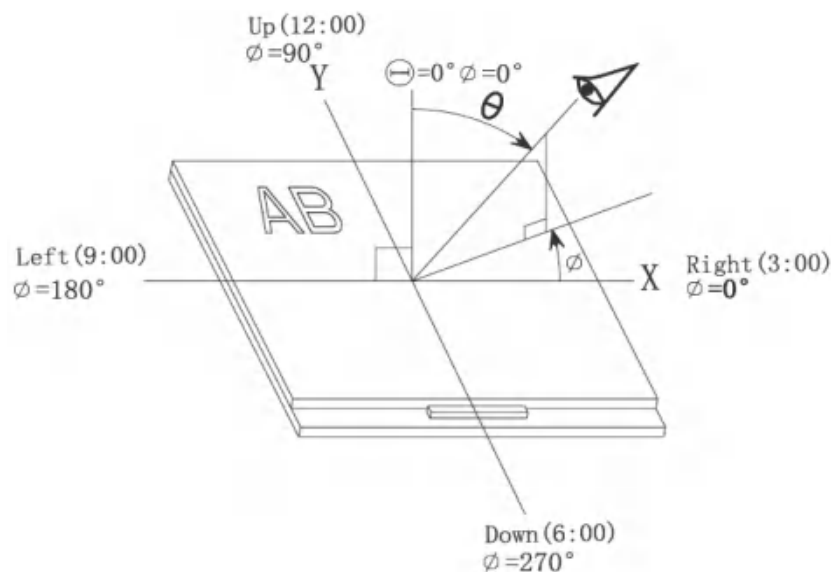


Note 4: Definition of contrast ratio.(Test LCD using DMS501)

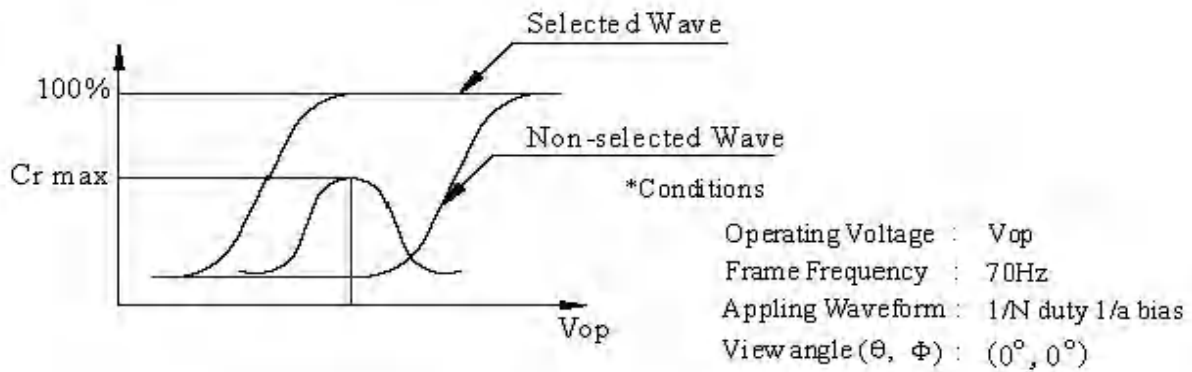

$$\text{Contrast ratio}(Cr) = \frac{\text{Brightness of selected dots}}{\text{Brightness of non-selected dots}}$$


Note 5: Definition of Response time. (Test LCD using DMS501):

The output signals of photo detector are measured when the input signals are changed from “white” to “black”(rising time) and from “black” to “white”(falling time) , respectively. The response time is defined as the time interval between the 10% and 90% of amplitudes.Refer to figure as below.

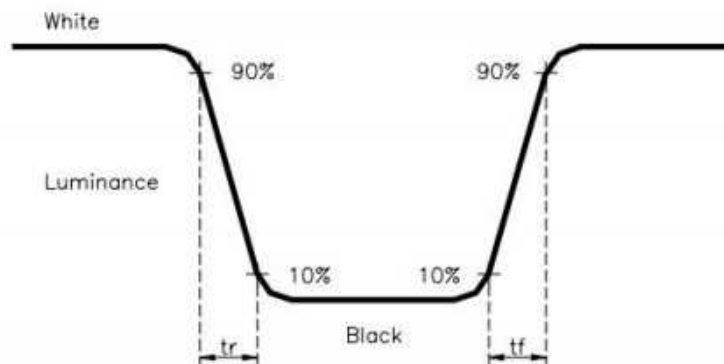

The definition of response time

Note 6: Definition of Color of CIE Coordinate and NTSC Ratio.

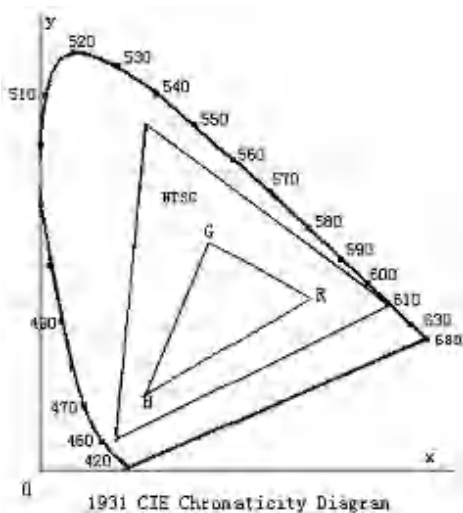


Color gamut:

$$S = \frac{\text{area of RGB triangle}}{\text{area of NTSC triangle}} \times 100\%$$


Note 7: Definition of cross talk.

Cross talk ratio(%)=|pattern A Brightness-pattern B Brightness|/pattern A Brightness*100

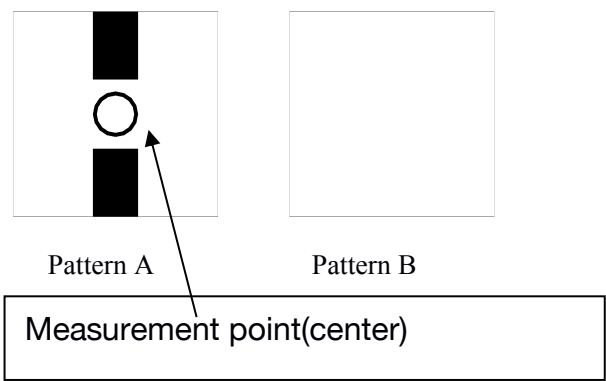

Electric volume value=3F+/-3Hex

8. Reliability Test Items and Criteria

No	Test Item	Test condition	Criterion
1	High Temperature Storage	80°C±2°C 96H Restore 2H at 25°C Power off	1. After testing, cosmetic and electrical defects should not happen. 2. Total current consumption should not be more than twice of initial value.
2	Low Temperature Storage	-30°C±2°C 96H Restore 2H at 25°C Power off	
3	High Temperature Operation	70°C±2°C 96H Restore 2H at 25°C Power on	
4	Low Temperature Operation	-20°C±2°C 96H Restore 4H at 25°C Power on	
5	High Temperature/Humidity Storage	60°C±2°C 90%RH 96H Power off	
6	Temperature Cycle	 after 5 cycle, Restore 2H at 25°C Power off	
7	Vibration Test	10Hz~150Hz, 100m/s2, 120min	Not allowed cosmetic and electrical defects.
8	Shock Test	Half- sine wave,300m/s2,11ms	

Note: Operation: Supply 3.3V for logic system.

The inspection terms after reliability test, as below

ITEM	Inspection
Contrast	CR>50%
IDD	IDD<200%
Brightness	Brightness>60%
Color Tone	Color Tone+/-0,05

9. Precautions for Use of LCD Modules

9.1 Handling Precautions

9.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

9.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

9.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

9.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

9.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, moisten cloth with one of the following solvents:

- Isopropyl alcohol
- Ethyl alcohol

Solvents other than those mentioned above may damage the polarizer. Especially, do not use the following:

- Water
- Ketone
- Aromatic solvents

9.1.6 Do not attempt to disassemble the LCD Module.

9.1.7 If the logic circuit power is off, do not apply the input signals.

9.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.

- a. Be sure to ground the body when handling the LCD Modules.
- b. Tools required for assembly, such as soldering irons, must be properly ground.
- c. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- d. The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

9.2 Storage precautions

9.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

9.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:

Temperature : $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$

Relatively humidity: $\leq 80\%$

9.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

9.3 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

END