




Front view

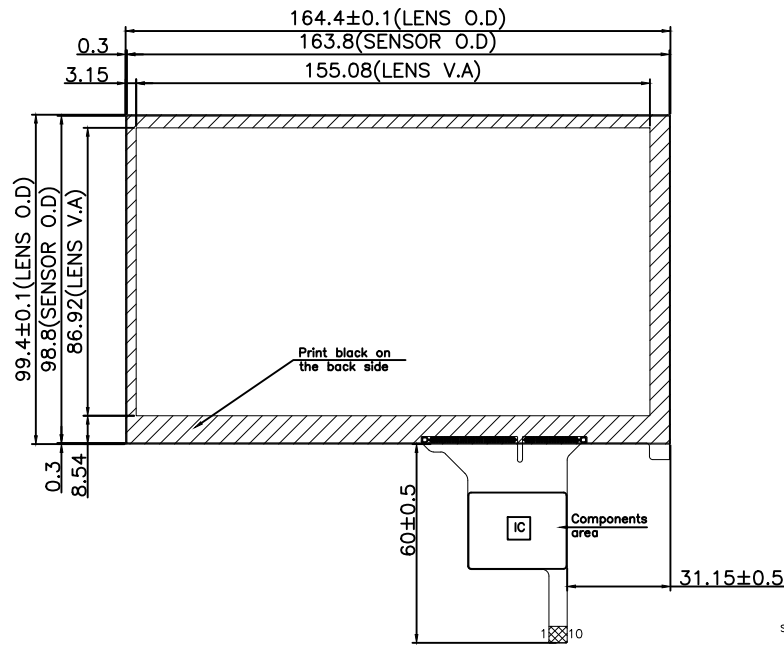

Side view

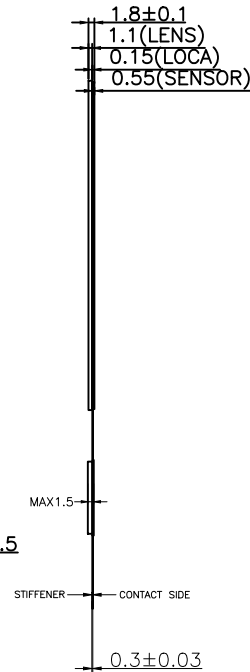

Back view

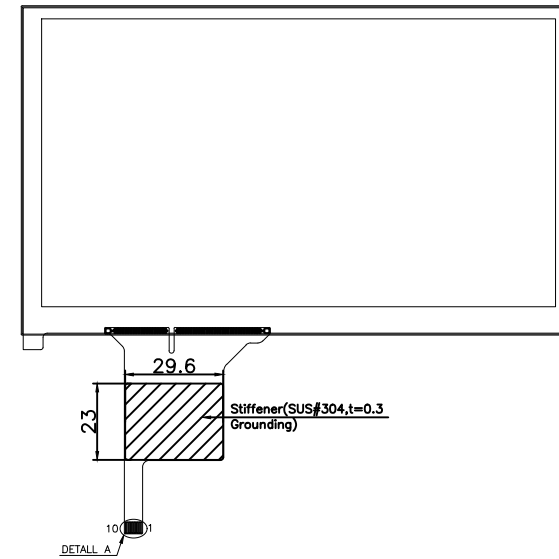


Note :

1. Structure: G+G
COVER LENS(Tempered glass)+SENSOR(ITO glass)
2. IC: Atmel641T (16*28) ;
3. transmission : ≥85%
4. Surface hardness : 6H 750g ;
Impact energy ≥0.35J
5. Multi finger : 10(Max)
6. Operating temp : -20℃~+70℃
7. Storage temp : -30℃~+80℃
8. General tolerance: ±0.2mm

ASSIGNMENT:

1	VSS
2	VDD
3	SCL
4	NC
5	SDA
6	NC
7	RST
8	NC
9	INT
10	VSS

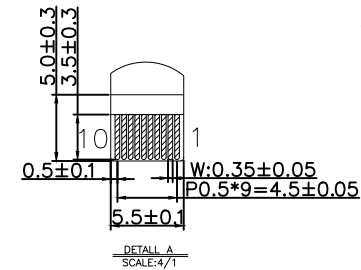

					DRAWN	CZF 2019.7.10	TITLE	DRAWING NO.
					ME.CHECKED		MODULE SPEC.	CTP-T700GA-51
					EE.CHECKED			UNIT mm SCALE FT
					APPROVED			3rd Angle 3rd Angle SHEET 1 OF 1
00		First issue			CUSTOMER'S APPROVAL		VICTRONIX TECENSTAR INT'L CO., LIMITED	
VER.	SYMBOL	AMENDMENT	SIGN	DATE				